

TECHNICAL SPECIFICATION		
External dimensions (WxDxH)*	260×260×240cm	
Internal dimensions (WxDxH)*	250×250×220cm	
Indoor area	6,25m²	
Weight	1350kg	
Required free height for installation	250cm	
Soundproofing	Class A (ISO 23351-1)	41-46dB Rw (ISO 717)
Glass	16mm Sound Control laminated safety glass	
Door	Dual panel sliding door, wheelchair access	
Door handing	Left or right hand	
Ventilation	Automatic +120l/s	
Ventilation control	Smart CO2 controller	
Ventilation fan	Radial fan, heavy duty	
Air filtration:	AIR SPEC:	CLEAN SPEC:
	G4	G4 + & HEPA H 13 (ISO-7 level IAQ)
Lighting:	Dimmable LED 4000K, motion detector	Antimicrobial Spectral Blue + Dimmable LED 4000K, motion detector
Usage	Continuous, 24/7	
Connectivity	4 pcs power socket, USB A+C (charging), 2 pcs RJ45	
Power supply	110-240 VAC / 10-16A / 50-60Hz	
Power and network cable	5 meters	
Power	100W (avg) 550W (peak)	
Fire safety	UL 723: Class A-C (surface) ASTM E648: Class 1 (flooring) BfL-S1 (flooring)	
Electrical safety	EN-IEC 60335-1:2024 UL 962 (E514776)	
Seismic safety	Special SEISMIC Certification(2019-0176-COC-01-00) International Building Code (IBC) 2024 California Building Code (CBC) 2025	

(*) May vary a few centimeters, depending on the selected structure and door(s) location. Ask our sales team for customized sizes, heights, and door solutions

OPTIONS
AV kit in technology panel (includes HDMI/USB A DATA/POWER/VESA BRACKET)
AV kit in separate AV panel (includes HDMI/USB A DATA/POWER/VESA BRACKET)
Air conditioning
Additional sliding door
Electromagnetic lock (can be connected to 3rd party systems)
Door ramp pair (threshold without ramp is only 15mm)
Additional acoustic panels with velcro fixing
Sprinkler opening
Privacy glass (electric dimming with remote controller)

PACKAGING	
Crate #1	249×77×134cm 550Kg
Crate #2	249×77×124cm 550Kg
Crate #3	273×77×94cm 400Kg
Crate #4	273×77×94cm 400Kg

STRUCTURE OPTIONS

#1

#2

#3

#4

#5

#5CS*

In the standard pod, the door can be placed on any element on the front wall and can be left or right handed. Ask our sales team if you interested in a pod with a door on side wall.

(*) #5CS is a dual door customer service pod that comes with added cost.




Standard range


ECOfelt
90% wool, 10 recycled PET
Interior | Walls and ceiling
www.slalom-it.com



ECOfelt 955
Ghost white



ECOfelt 953
Grey



ECOfelt 923
Dark grey




ECOfelt 332E
Caramel




ECOfelt 952
Beige

Aluminium
Interior & Exterior | Profiles
makelaalu.fi




RAL 9016
White




RAL 9004
Black



RAL 5004
Black Blue




RAL 7006
Beige Grey




RAL 080 90 10
Mushroom white

Koskisen MFC
Exterior | Wall panels
koskisen.com



Basic White



U999 TM9
Black



U599
Indigo Blue



H1399 ST10
Truffle Brown Denver Oak




H3157 ST12
Vicenza Oak



U115 ST9
Carat Beige

Tapibel Cobalt SDN
100% polyamide
Interior | carpet
Tapibel.be



64041
Light Grey



64051
Dark grey



64010
Light Beige




64031
Dark Beige

Rooftop is always white (visible only from bird's eye perspective).



Extended range

EGGER MFC
Exterior | Wall panels
egger.com



H1227 TM12
Brown Abano Ash




U640 ST9
Olive Green



U325 ST9
Antique Rose

Aluminium
Interior & Exterior | Profiles
makelaalu.fi



RAL 070 30 10
Dark Brown




RAL 100 60 20
Olive Green




NCS S3010-Y80R
Rose


Tapibel Cobalt SDN
100% polyamide
Interior | carpet
Tapibel.be



64020
Beige



64044
Mid Grey




64061
Grey Blue

Custom range

MATERIAL	APPLICATION	MORE INFO
Slalom Acoustics ECOfelt	Interior or exterior walls / Ceiling	slalom-it.com
Egger eurodecor MFC or HPL	Exterior walls	egger.com
HVL Real wood veneer	Exterior walls	hvloy.com
RAL Classic / Design	Profiles	ral-farben.de
Tapibel Cobalt SDN	Carpet	tapibel.be
Gerflor GTI Tiles / Mipolam Affinity EL7	Flooring	gerflor.com

Contact our sales team for other options.

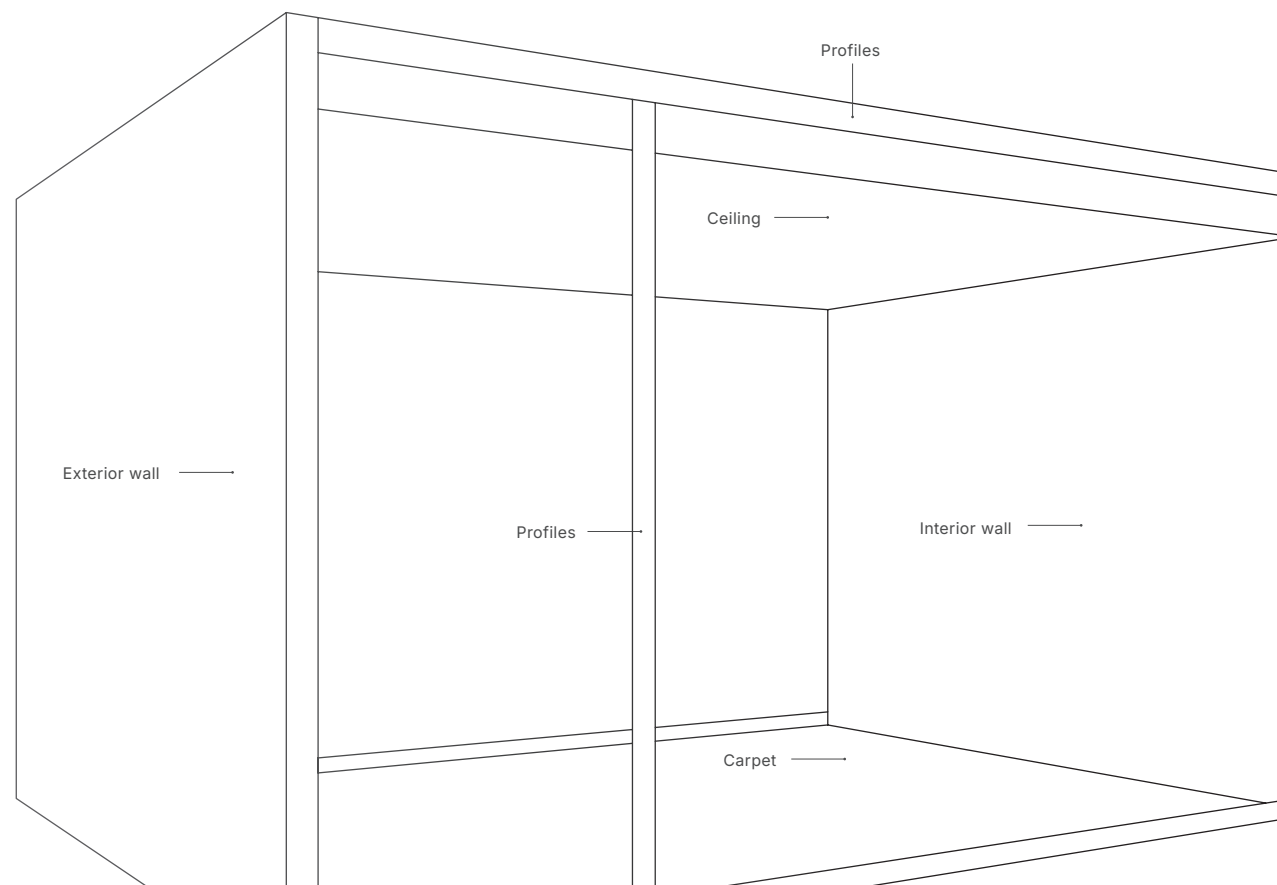



The anywhere workspace.

POD FLEXIBILITY WITH ROOM PERFORMANCE



Patent pending.
vetrospace.com/legal



Vetrospace Ltd

HQ & Showroom

Tyynenmerenkatu 5
00220 Helsinki
Finland

Factory & Showroom

Otto Korhosen Katu 1
20660 Littoinen
Finland

Contact:

+358 10 5820 670
info@vetrospace.com
www.vetrospace.com

VETRO  **SPACE**